



PCT/EP200 4 / 0 0 5 5 2

EP04/5524



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 26 JUL 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

Stephen Handley

Dated 26 May 2004

BEST AVAILABLE COPY



23MAY03 EB09621-1 D10180
P01/7700-0.00-0311854.4

Effective

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference PU0345

2. Patent application number
(The Patent Office will fill in this part)

0311854.4

23 MAY 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

AMERSHAM BIOSCIENCES AB
Bjorkgatan 30
SE 751 84 Uppsala
Sweden

Patents ADP number (if you know it)

82491 2000 1

If the applicant is a corporate body, give the country/state of its incorporation

Sweden

4. Title of the invention

CHROMATOGRAPHY COLUMN WITH MOVABLE ADAPTER

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

HAMMER, Catriona, MacLeod ; ROLLINS, Anthony, John and HAMMETT, Audrey, Grace, Campbell
Amersham plc
Amersham Place
Little Chalfont
Buckinghamshire HP7 9NA

Patents ADP number (if you know it)

818937 5004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s) 1

Abstract 1

Drawing(s) 6 only

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

HAMMER, Catriona, MacLeod

Signature

Date

23 May 2003

12. Name and daytime telephone number of person to contact in the United Kingdom LIVINGSTONE, Helen 01494 542039

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

CHROMATOGRAPHY COLUMN WITH MOVABLE ADAPTER

FIELD OF THE INVENTION

5 The present invention relates to a column construction which includes a movable adaptor that can be used to deliver liquid to or to lead liquid away from a liquid permeable bed inside the column. The expression "movable" means that the adaptor can be moved in the direction of flow applied during an adsorption/desorption/washing process.

10 DESCRIPTION OF THE BACKGROUND ART

Movable adapters have been used in chromatography in conjunction with matrices which are packed conventionally in columns and also in expanded bed columns. The controlled movement of the adapters has been achieved by applying a controllable force to the adaptor, for example, by applying a hydraulic/pneumatic pressure to the sealed space between the adaptor and an upper end-piece of the column. This requires the use of a hollow duct which extends up from the adaptor through the column end-piece, in order to act as a conduit for liquids flowing to or from the adaptor. One such column is shown in US Patent 6280616.

20 The main drawbacks of this arrangement is that because the duct attached to the movable adapters is almost as long as the column, the height of the ceiling above a column must be in the order of twice the height of the column in order to accommodate the length of the duct which protrudes from the top of the column when the adapter is at its highest position.

25 The present invention provides improvements with regard to the drawback of the prior art.

An example of a column in accordance with the present invention is shown in the appended drawings. The drawings are not to scale.

30

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1a) is a schematic lateral view of a prior art chromatography column with a movable adapter in its lowest position;

Figure 1b) is a schematic lateral view of the same column with the movable adapter in its highest position;

Figure 2a) is a schematic lateral view of a first embodiment of a chromatography column in accordance with the present invention with a movable adapter at its lowest position;

Figure 2b) is a schematic lateral view of the first embodiment of a column in accordance with the present invention with the movable adapter in its highest position;

Figure 3 is a schematic lateral view of another embodiment of a column in accordance with the present invention; and,

Figure 4 is a schematic lateral view of a further embodiment of a column in accordance with the present invention.

Details of the embodiments which have the same function have been identified with the same reference numerals in the figures, unless otherwise stated.

DESCRIPTION OF THE INVENTION

Figure 1 shows a chromatography column 1 which comprises a column tube 3 which connects a first end plate 5 positioned at the lower end of the column tube 3 with a second end plate 7 positioned at the top end of the column tube 3. First end plate 5 is provided with a bottom adaptor 9 and has a through hole 11 through which liquid can be delivered to/led away from the bottom adaptor 9. Bottom adaptor 9 is provided with a distribution system 10 for the distribution/collection of liquid flow towards/from the lower part of a column bed 13.

Second end plate 7 is provided with an inlet/outlet for pressurised fluid 15 which is connectable to a source (not shown) of pressurised fluid such as pressurised hydraulic fluid or pressurised gas. A movable adapter 17 is positioned in the column above the column bed 13 and below the second end plate 7. Movable adapter 17 seals against the inside wall of the column tube 3. Movable adapter 17 is provided with a distribution system 19 for the distribution/collection of liquid flow towards/from the upper part of the column bed 13. A hole 21 extends through the movable adapter 17 from the distribution system 19 to the face of the movable adapter facing the second end plate 7. A hollow rigid duct 23 extends parallel to the longitudinal axis of the column from the face of the movable adapter facing the second end plate 7 through a duct receiving opening 25 in the second end plate 7. Sealing means 27 are provided between duct 23 and duct receiving opening 25 to prevent leakage of fluids out of the space 29 between the movable adapter 17 and the second end plate 7. Hollow rigid duct 23 encloses a conduit 31 which is connected to hole 21 and which can be used to deliver fluid to, or lead fluid away from, the movable adapter 17.

In figure 1 a) the movable adapter 17 has been pushed to a position in the lower region of the column 1 by pressurised fluid applied to the sealed space between movable adapter 17 and second end plate 7. Only a small length of hollow rigid duct extends above second end plate 7.

In figure 1 b) the movable adapter 17 has been moved to a position in the upper region of the column 1 by reducing the pressure of the pressurised fluid in the sealed space between movable adapter 17 and second end plate 7 and/or increasing the pressure of the fluid in the column bed and/or by pulling on hollow rigid duct 23. In this position a large length of hollow rigid duct 23 extends above second end plate 7 and any building in which the column is mounted needs to have a ceiling high enough to accommodate this large length.

Figures 2a and 2b show schematically a first embodiment of a chromatography column provided with a movable adapter in accordance with the present invention. In this column the hollow rigid duct 23 known from the prior art is replaced by a flexible duct 33. Flexible duct 33 is slidable through a duct receiving opening in second end plate 7. Flexible duct 33 is preferably made from smooth walled tubing which is stiff enough to seal against sealing

- means 27 (which are provided in the duct receiving opening 25 in second end plate 7) when it slides past said sealing means 27. At the same time flexible duct 33 should preferably be flexible enough so that instead of projecting vertically out of duct receiving opening 25 (i.e. parallel with the longitudinal axis of the column) it can be bent to lie substantially
- 5 perpendicular to the longitudinal axis of the column, thereby reducing the amount of free space needed above the column to accommodate the duct. To ease handling, flexible duct 33 may be flexible enough to be wound onto duct storage means - such as a reel 35 or drum positioned outside the column - as the movable adapter 17 is raised towards the second end plate 7. Removing the duct from the column as the movable adapter 17 rises prevents the
- 10 duct 33 from collecting inside the column between the movable adapter 17 and the second end plate 7 where it could be damaged or where it could prevent the movable adapter 17 from rising all the way to the second end plate 7. Conduit 31 is also made flexible enough to follow the bending of flexible duct 33. Figure 2a) shows the column when the movable adapter is at a position in the lower region of the column 1. Figure 2b) shows the column
- 15 when the movable adapter is at a position in the upper region of the column 1. Instead of projecting vertically, duct 33 and conduit 31 are bent sideways after exiting the duct receiving opening 27'. Dotted lines show how much the flexible duct 33 and conduit 31 would extend above the column if they were rigid and projected parallel to the longitudinal axis of the column tube instead of being flexible and able to be bent sideways.
- 20
- Figure 3 shows a second embodiment of the present invention. In this embodiment, duct 33 surrounds a plurality of conduits 31, 31', 31'', 31''' which are connected to different parts of movable adapter 17. Conduit supplies fluid to the movable adapter as shown in the previous embodiments. The conduits 31'-31''' (shown by solid lines) may be used for different
- 25 functions such as supplying fluids to the interior of the column without passing through the distribution system 19 (see conduit 31'), or cleaning the distribution system e.g. by supplying fluid to the distribution system with conduit 31'' while removing fluid from another part of the distribution system with a different conduit 31''', etc.
- 30
- Figure 4 shows another embodiment of the present invention. In this embodiment, duct 33 acts as a conduit connectable to hole 21 in movable adapter 17.

Possible suitable materials for the flexible ducts and conduits are tubes made of plastic, composite materials and metals. The ducts and conduits may be reinforced, for example with helical or round reinforcing strips or wires in order to ensure a good seal against the duct receiving opening sealing means, and may be coated with low-friction coating to facilitate sliding through the sealing means in the duct receiving opening. Said sealing means can be any sealing means which prevent leakage of pressurised fluid through the duct receiving opening while at the same time allow the duct to slide through the sealing means.

While the invention has been illustrated by examples showing columns using packed beds, it is also applicable to columns using expanded beds.

The above mentioned embodiments are intended to illustrate the present invention and are not intended to limit the scope of protection claimed by the following claims.

CLAIMS

1. Chromatography column comprising a first end plate (5) and a second end plate (7) separated by a column tube (3), wherein said column tube contains a movable adapter (17) connected to a duct (33) able to slide through a duct receiving opening (25) passing through said second end plate (7) characterised in that said duct (33) is flexible.
5
2. Chromatography column in accordance with claim 1 characterised in that said duct receiving opening (25) is provided with sealing means (27) for slidably sealing against said duct (33).
10
3. Chromatography column in accordance with any of the previous claims characterised in that said duct (33) contains at least one flexible conduit (31-31'') connectable to said movable adapter.
15
4. Chromatography column in accordance with any of the previous claims characterised in that said column is provided with duct storage means (35) positioned outside said column.
20
5. Chromatography column in accordance with claim 4 characterised in that said duct storage means (35) is a reel or drum.

7'


ABSTRACT

In order to reduce the space required above a chromatography column provided with a movable adapter (17) connected to a duct (33) able to slide through a duct receiving opening (25') in an end plate (7) of the column, the duct (33) is made flexible.

Fig. 2b)



1
2
3

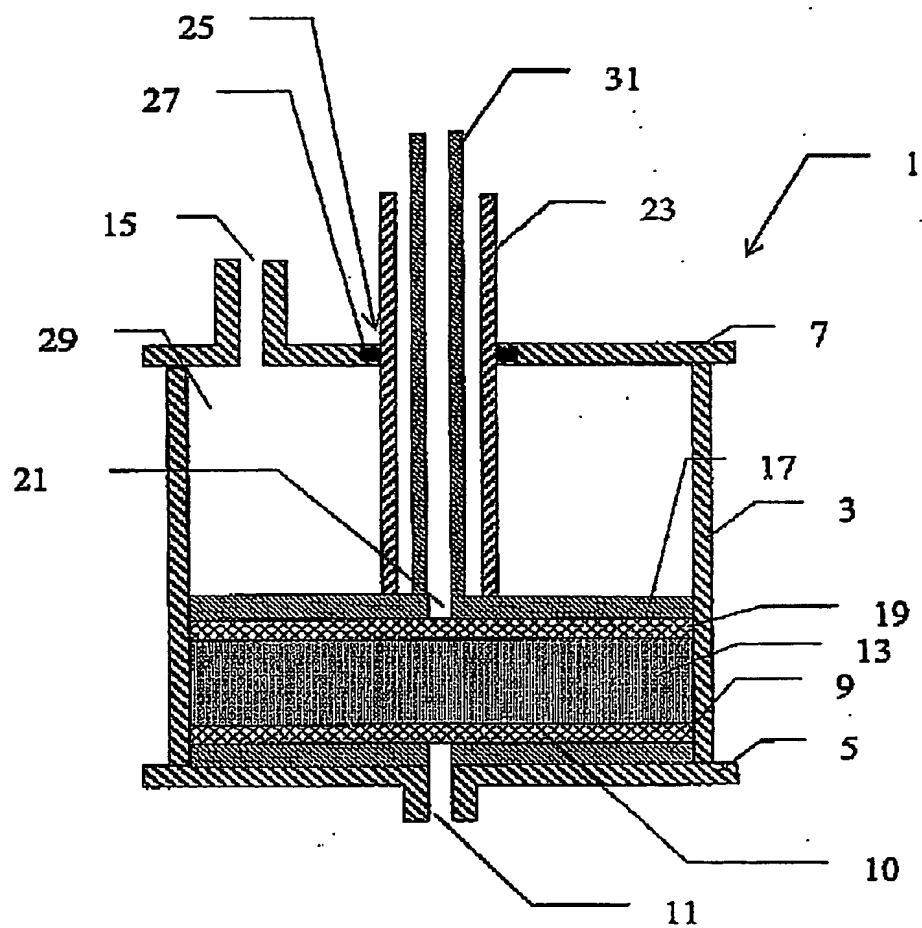

2 / 6

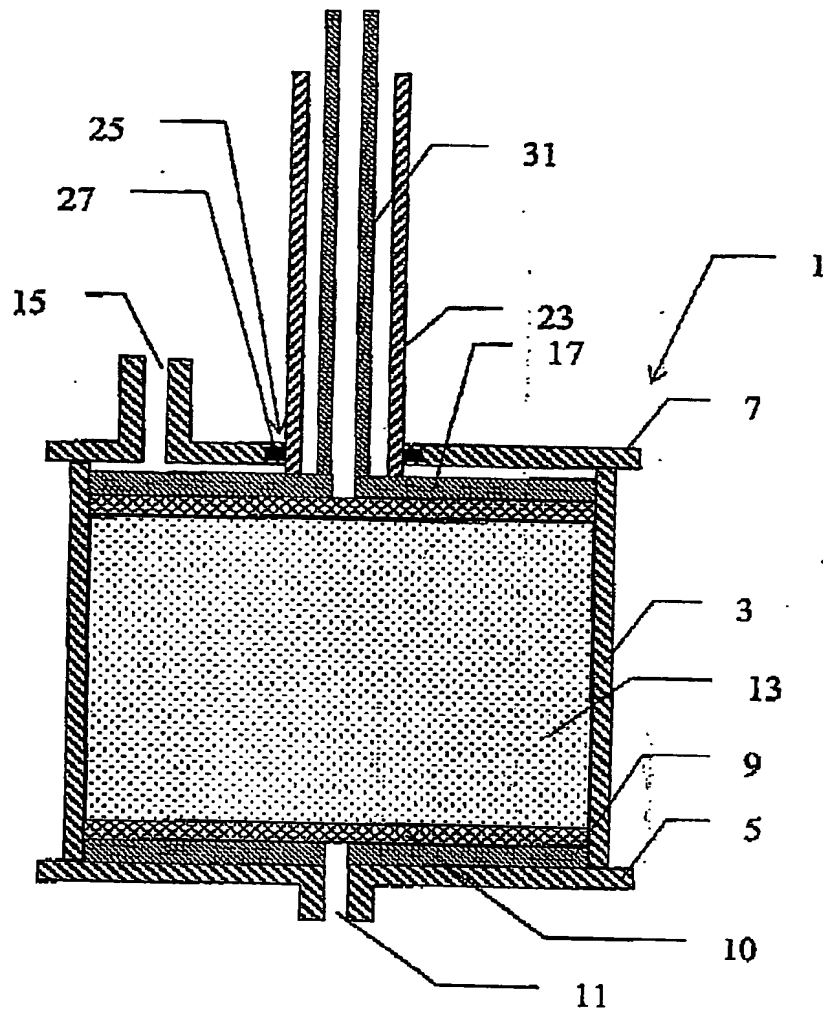


Fig. 1b

3 / 6

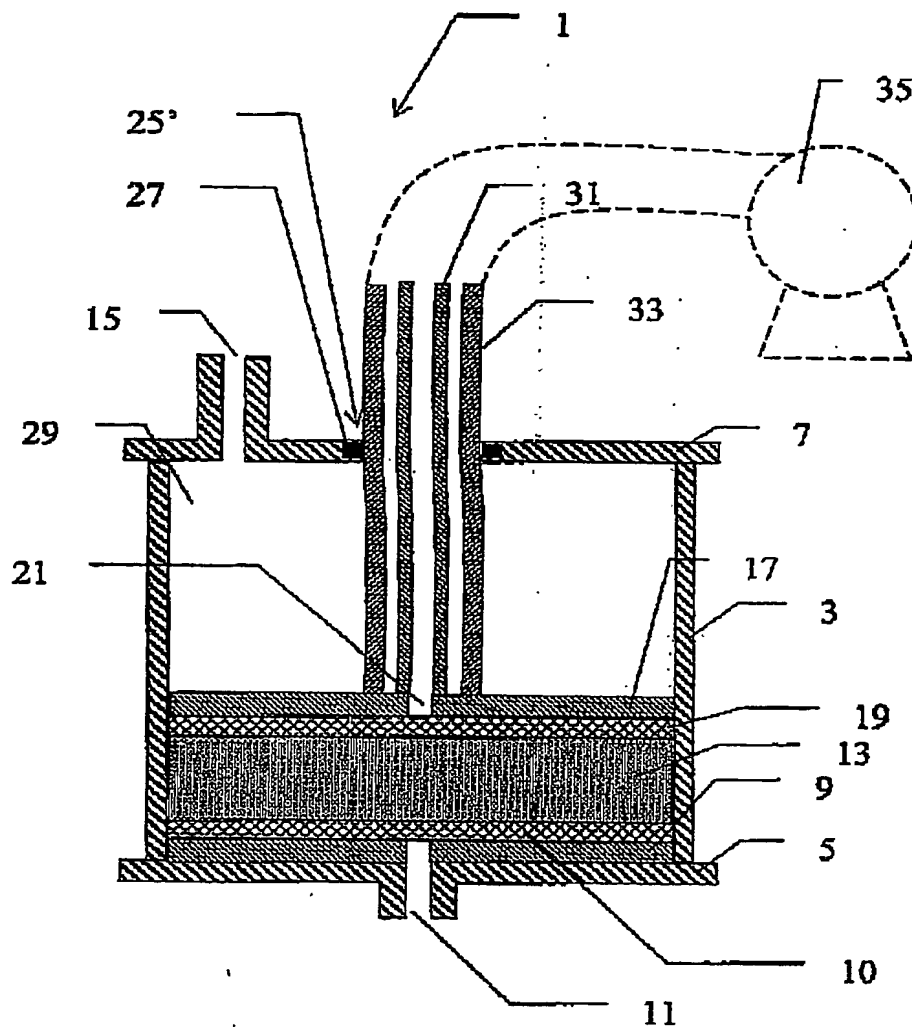


Fig. 2a

4 / 6

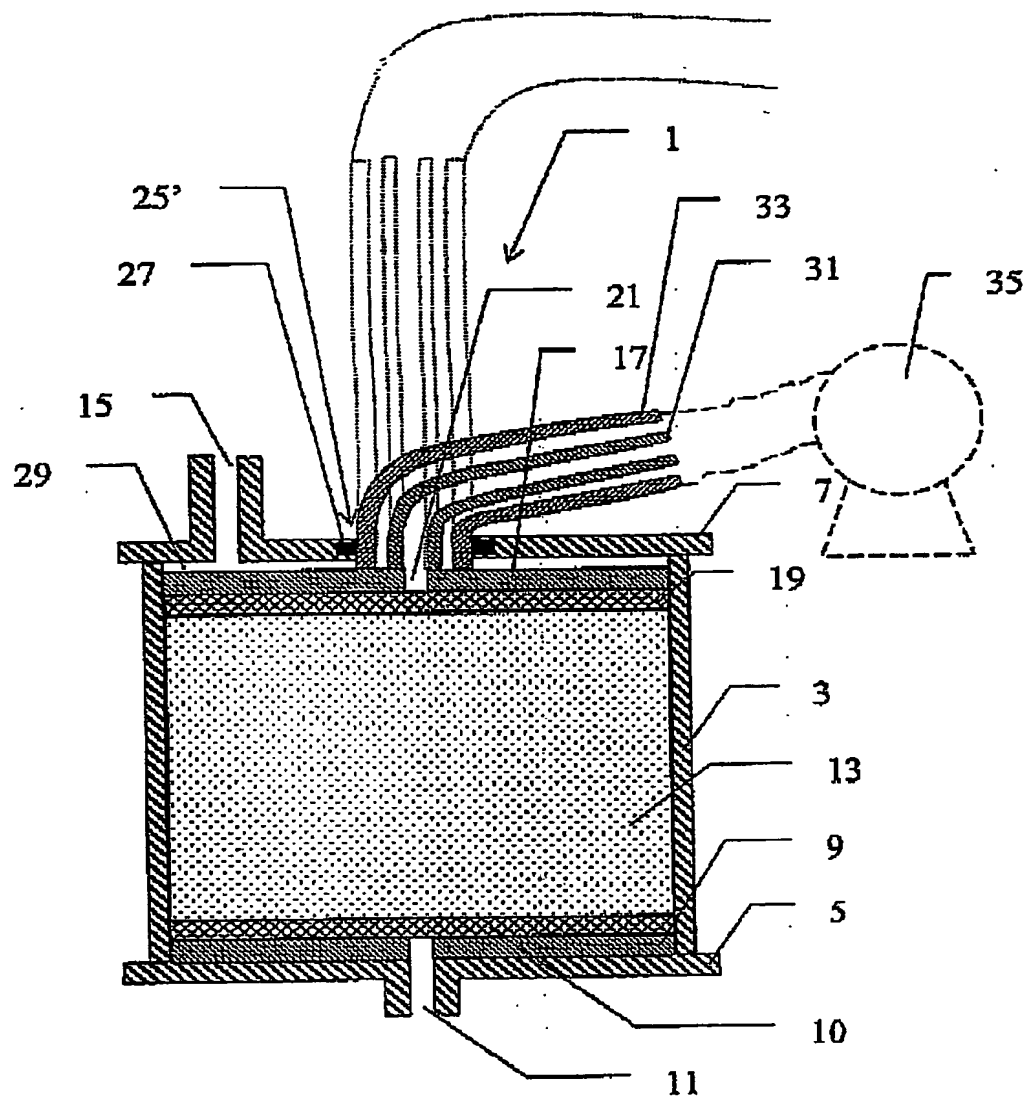


Fig. 2b

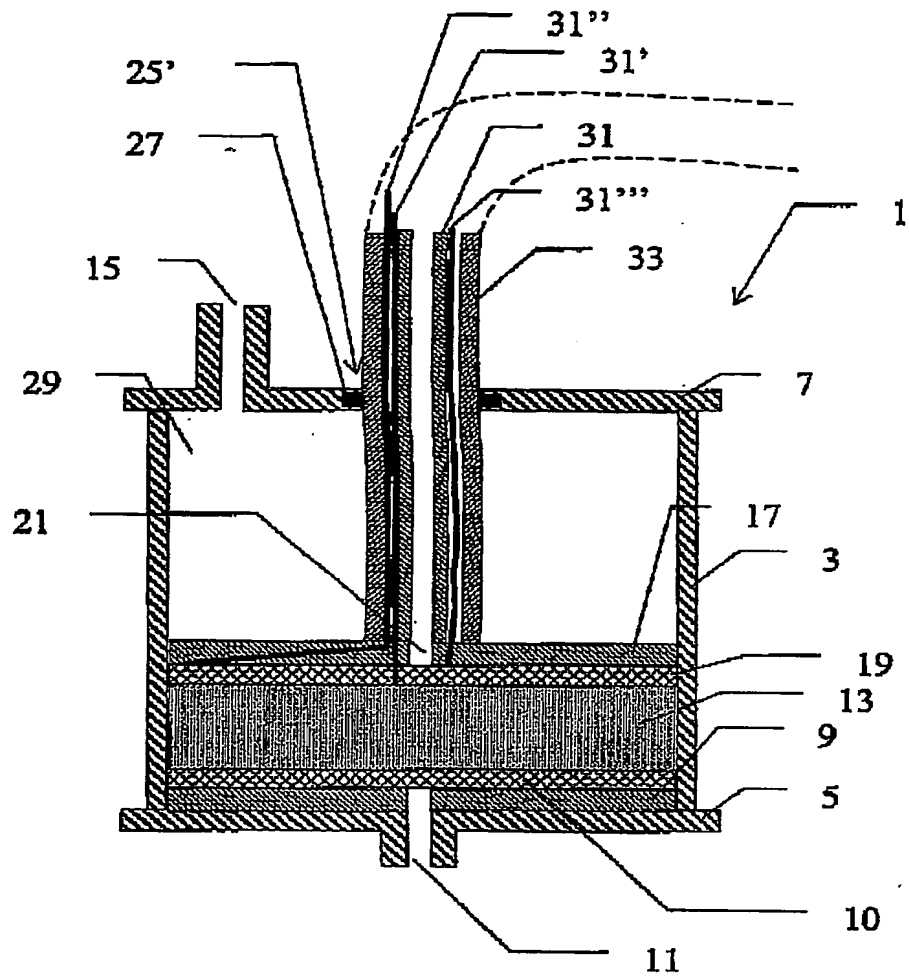


Fig. 3

6 / 6

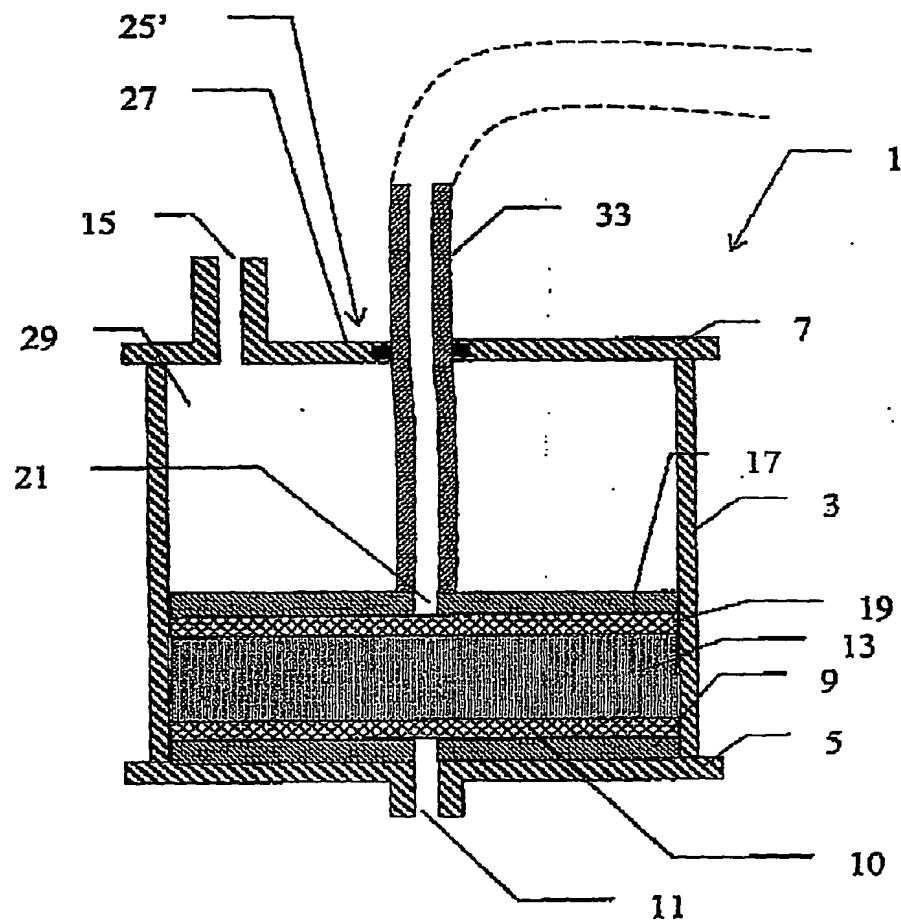


Fig. 4

PCT/EP2004/005524 *Alk*



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.